

HIGH-PERFORMANCE
MODEL

WUN 634GU

Capacity: 63kg
Weight: 2,100kg

- Excellent cleaning quality
- Easy-to-clean drain valve
- Automatic cleaning program
- Reduction of initial costs
- 10 water level settings
- Highly durable shock absorbers and springs



The touch panel with a high-brightness monitor provides excellent operability.


Detailed settings for each course allow for precise cleaning

- 100 different courses can be set
- Course name and comments can be registered
- A total of 14 processes (13 washing and spin-drying) can be set for each course.
- Conditions (water level, rotation speed, rotation operation time, etc.) can be set for each process
- Process details are always displayed during operation


Delicate movement adjustment is possible.

Drum rotation speed can be controlled in 1 rpm increments, and drum rotation time can be controlled in 1-second increments.

Course selection screen



IO monitor screen



The optimum amount of water can be selected

The water level can be set in 10 stages. The optimum water volume can be set according to the number of items, which reduces running costs (water, detergent, fuel).

OPTION

■ Fallout prevention apron

When taking clothes in and out of the machine, it prevents them from falling into the gaps between the laundry and prevents them from getting lost.



OPTION


Hot water solenoid valve

A water hammer reduction type that reduces vibrations that occur when the water flow is stopped



Two drains & three inlets

A system is used that reuses wastewater. Two-drain system separates dirty drainage and recycled drainage, which is used for cleaning purposes by three inlets. Therefore, the water supply amount used for cleaning can be significantly reduced.

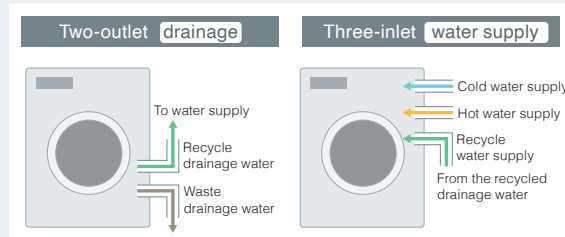

SPECIFICATION

WUN634GU			
Capacity	23kg	Cold Water Supply	1"
Drum	Diameter 762/ Depth 486	Hot Water Supply(Optional)	1"
A speed(Wash)	20-50 min ⁻¹	Water Drain	2 1/2"
Speed(Extract)	880min ⁻¹ (330G)	Steam/Steam Drain	1/2"/ 3/8"
Volts	3P4W, AC380-415V, 50-60Hz	Water level	10-step water level : 23-164L
Minimum Supply-Circuit Conductor Ampacity	15A	Machine Size	Width 1011/ Depth 1183/ Height 1565
Motor	3.7kW 4P	Weight of empty machine	660kg

EXTERNAL VIEW

