

HIGH-PERFORMANCE
LARGE SIZE MODEL

WUN 1184GU

Capacity: 118kg

Weight: 5,220kg




- Excellent cleaning quality
- Easy-to-clean drain valve
- Automatic cleaning program
- Extra-large water supply valve
- Reduction of initial costs
- 10 water level settings
- Highly durable shock absorbers and springs
- Pneumatic door lock and release

Space-saving design

Developed to minimize installation space while increasing processing capacity, this machine is a downsized version of our previous model, the WN1001Z, with a thorough space-saving design.


Automatic oil supply to the main shaft oil seal

When the oil level is low, a warning is displayed on the touch panel. Proper oil management will extend the life of the bearings.

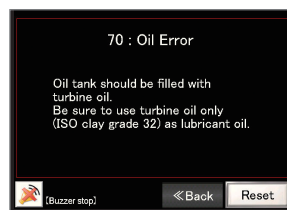


Excellent durability and vibration resistance

The air ride absorbs vibrations during drum rotation, stabilizing the dry spin rotation.

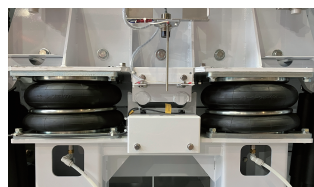

The touch panel with a high-brightness monitor provides excellent operability.

Detailed settings for each course allow for precise cleaning

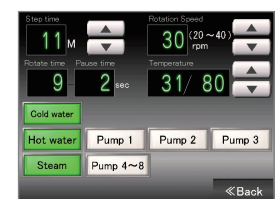

Fall prevention apron

When taking clothes in and out, it prevents laundry from falling between the gaps and getting lost.

Disc brakes

The disc brake stops the inertial rotation during dry spinning, reducing lost time.


Manual drum rotation switch

The basket can be stopped at any position, making it easy to remove any items stuck to it after dry spinning.


SUPERIOR FEATURE

Unique mechanism that improves work efficiency

WUN1184GU The drum tilts back and forth, allowing for efficient laundry loading and unloading.



The drum tilts upward (backward), making it easy to insert laundry into the back.



The drum tilts downward (forward), making it easier to pick up laundry.



Semi-automatic design


OPTION

Two drains & three inlets

A system is used that reuses wastewater.

Two-drain system separates dirty drainage and recycled drainage, and the recycled drainage is used for cleaning purposes by three inlets.

Therefore, the water supply amount used for cleaning can be significantly reduced.

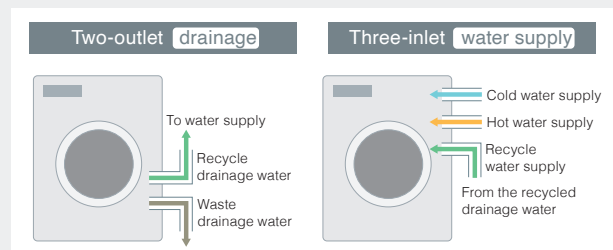

SPECIFICATION

WUN1184GU			
Capacity	118kg	Cold Water Supply	2"
Drum	Diameter 1320 / Depth 860	Hot Water Supply(Optional)	2"
Apeed(Wash)	20-40 min ⁻¹	Water Drain	4"
Speed(Extract)	640min ⁻¹ (303G)	Steam/Steam Drain	1"
Volts	3P4W,AC380-415V, 50-60Hz	Water level	10-step water level : 131-651L
Minimum Supply-Circuit Conductor Ampacity	37A	Machine Size	Width 2010/ Depth 2323/ Height 2062
Motor	18.5kW 6P	Weight of empty machine	5220kg

EXTERNAL VIEW

